



**HAL**  
open science

# Yin-Yang spiraling transition of a confined buckled elastic sheet

Stéphanie Deboeuf, Suzie Protière, Eytan Katzav

► **To cite this version:**

Stéphanie Deboeuf, Suzie Protière, Eytan Katzav. Yin-Yang spiraling transition of a confined buckled elastic sheet. *Physical Review Research*, 2024, 6 (1), pp.013100. 10.1103/PhysRevResearch.6.013100 . hal-04197676v3

**HAL Id: hal-04197676**

**<https://hal.sorbonne-universite.fr/hal-04197676v3>**

Submitted on 8 Feb 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

## Yin-Yang spiraling transition of a confined buckled elastic sheet

Stéphanie Deboeuf<sup>1,\*</sup>, Suzie Protière,<sup>1</sup> and Eytan Katzav<sup>2</sup>

<sup>1</sup>*Sorbonne Université, CNRS, UMR 7190, Institut Jean Le Rond d'Alembert, F-75005 Paris, France*

<sup>2</sup>*Racah Institute of Physics, The Hebrew University, Jerusalem 9190401, Israel*



(Received 16 August 2023; accepted 18 December 2023; published 26 January 2024)

DNA in viral capsids, plant leaves in buds, and geological folds are examples in nature of tightly packed low-dimensional objects. However, the general equations describing their deformations and stresses are challenging. We report experimental and theoretical results of a model configuration of compression of a confined elastic sheet, which can be conceptualized as a one-dimensional (1D) line inside a 2D rectangular box. In this configuration, the two opposite ends of a planar sheet are pushed closer, while being confined in the orthogonal direction by two rigid walls separated by a given gap. Similar compaction of sheets has been previously studied and was shown to buckle into quasiperiodic motifs. In our experiments, we observed a different phenomenon, namely the spontaneous instability of the sheet, leading to localization into a single Yin-Yang pattern. The linearized Euler Elastica theory of elastic rods, together with global energy considerations, allow us to predict the symmetry breaking of the sheet in terms of the number of motifs, compression distance, and tangential force. Surprisingly, the appearance of the Yin-Yang pattern does not require friction.

DOI: [10.1103/PhysRevResearch.6.013100](https://doi.org/10.1103/PhysRevResearch.6.013100)

### I. INTRODUCTION

Packing problems in confined geometries have attracted significant attention due to their relevance in science, engineering, and technology. There is an attempt to optimize the available space while maintaining the stability and integrity of the packed objects. A useful classification of packing problems is via the dimensionalities of the packed objects  $d$  and of the confining container  $D$ . A classical case is when  $D = d$ , such as in sphere packing or granular matter [1,2]. Not of less interest are lower dimensional objects, which can strongly deform due to possible high rotations, leading to nonlinear geometrical deformations. One-dimensional (1D) fibers [3] or 1D rods in 2D or 3D containers [4–8] are ubiquitous in nature, such as DNA in viral capsids [9,10] or spider-capture silk inside droplets [11]. Similarly, a 2D plate in a 3D container [12] exhibits interesting phases, which are relevant in plant leaves in buds [13,14] or geological folds [15]. However, the general equations describing deformations and stresses of tightly packed sheets or rods are challenging to solve [16–18].

In this article, we study a model system consisting of a compressed elastic sheet, which can be conceived as a 1D line inside a 2D rectangular box. The two opposite ends of a planar sheet are moved closer, while confined in the orthogonal direction by two rigid walls separated by a given gap. A similar compaction was studied by Roman and Pocheau

[19], but the gap between the two walls was decreased, while keeping the lateral length fixed. One can wonder whether the reported quasiperiodic buckled motifs [19–21] remain when the direction of compression is modified [22–31] and if this influences the stability diagram of the sheet. Surprisingly, we observe a spontaneous instability of the sheet, leading to the formation of a single Yin-Yang pattern. Interestingly, this pattern is common to other confined configurations [32–38]. On the one hand, we measure experimentally both mechanical and geometrical properties of the sheet, during the lateral compression process. On the other hand, we develop a theoretical description based on the Euler Elastica theory of elastic rods and inspired by the work of Chai [25]. We demonstrate that the linearized theory describes well some regimes and properties and we identify the mechanisms necessary for the emergence of the spiraling instability. The appearance of the Yin-Yang pattern does not require friction, although the latter should influence the threshold of the instability.

### II. EXPERIMENTAL SETUP

The experiment (Fig. 1) consists of the compression of a planar sheet under bilateral confinement inside a limited box of height  $h \sim 1$  cm and lateral length  $L = L_0 - \Delta \sim 10$  cm, where  $\Delta$  measures that compression ( $h/L \sim 0.1$ ). The friction forces acting between the sheet and the confining walls are reduced as much as possible by using lubrication powder. Polyester (polyethylene terephthalate) sheets are characterized by a Young modulus  $E \sim 1$  GPa, length  $L_0 \sim 10$  cm, width  $W \sim 10$  cm, and thickness  $t \sim 100$   $\mu\text{m}$  ( $L_0/t \gg 1$  and  $h/t \gg 1$ ). The bending modulus is determined by  $B = Et^3/12(1 - \nu^2) \in [10^{-5}, 10^{-2}]$  J, where  $\nu \simeq 0.4$  is the Poisson ratio. See Table I for the values of the experimental parameters. The morphology of the sheet is observed to be uniform along the

\*stephanie.deboeuf@cnrs.fr

Published by the American Physical Society under the terms of the [Creative Commons Attribution 4.0 International](https://creativecommons.org/licenses/by/4.0/) license. Further distribution of this work must maintain attribution to the author(s) and the published article's title, journal citation, and DOI.

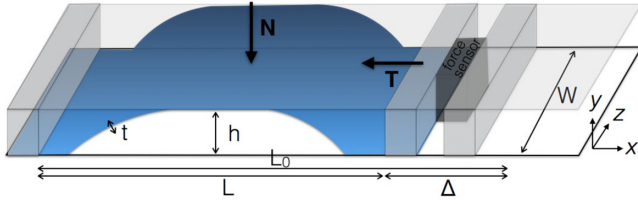


FIG. 1. Scheme of the experiment of compression of a planar sheet under bilateral constraints: the length, width, and thickness of the sheet are  $L_0$ ,  $W$ , and  $t$ ; the confining box is of height  $h$  and length  $L = L_0 - \Delta$ . A force sensor measures the tangential force  $T$ .

$z$  direction (namely along the width of the sheet), such that the experiment can be modeled as the compression of a 1D rod in a 2D rectangle. In essence, the lack of curvature along the  $z$  direction allows pure bending strains without stretching. Initially, the sheet is lying along the bottom wall, namely along  $y = 0$ . The sheet ends are clamped.

During one realization, the gap height  $h$  is kept constant, while the compression distance  $\Delta$  is slowly increased, at a velocity of around 0.5 mm/s. From one realization to another, the experimental control parameters  $t$ ,  $W$ ,  $L_0$ ,  $E$ , and  $h$  are varied and several realizations (3 or 4) are repeated for the same control parameters to investigate both the experimental reproducibility and the system multistability. A force sensor (Sensel Measurement, Futek LSB200 model) measures the tangential (compressive or tensile) force  $T$  exerted along the  $x$  direction, to which both elasticity and friction contribute. We denote the normal force exerted along the  $y$  direction by  $N$ . Simultaneously, pictures of the sheet profile are taken (NIKON D80 camera with 105 mm objective).

### III. EXPERIMENTAL PHENOMENOLOGY

As soon as we impose the compression distance  $\Delta \neq 0$ , compressive tangential forces  $T > 0$  appear (Fig. 2) and the sheet buckles (Fig. 3). As a result, the sheet comes into contact with the top wall, leading to a response different from free buckling (without constraint) [39]. With further compression, the contacts with the walls extend, changing from point to line contacts. This leads to a hierarchical process, where the line contacts behave like shorter rod segments, which in turn buckle, and so on (Fig. 3). After the first buckling event, one motif is observed, made of two antisymmetric free segments

TABLE I. Properties of the different samples of polyester sheet—Young modulus  $E$ , thickness  $t$ , width  $W$ , length  $L_0$ , and bending moduli  $B$ —and of the confining geometry: gap  $h$ . The different materials are sorted according to increasing thickness  $t$ .

$E$ (GPa)	$t$ ( $\mu\text{m}$ )	$W$ (cm)	$L_0$ (cm)	$B$ (J)	$h$ (mm)
2.5	60	20	23.5	$5 \times 10^{-5}$	10
4.0	75	20	20	$2 \times 10^{-4}$	10
2.5	90	20	23.5	$2 \times 10^{-4}$	[5 : 5 : 40]
4.0	100	5, 10, 20	5, 10, 20	$4 \times 10^{-4}$	10, 20, 40
5.0	120	20	23.5	$9 \times 10^{-4}$	[5 : 5 : 40]
4.0	125	20	20	$8 \times 10^{-4}$	10
2.5	340	20	23.5	$10^{-2}$	30, 35

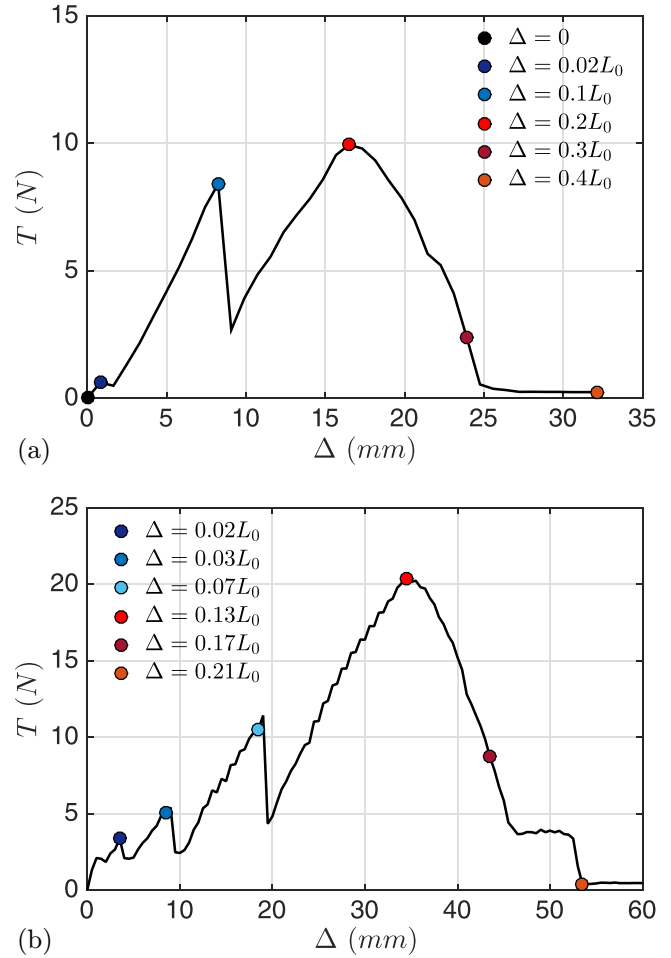


FIG. 2. Tangential force  $T$  as a function of the compression  $\Delta$  for two sets of experimental parameters:  $h = 10$  mm and  $W = 20$  cm; (a)  $L_0 = 10$  cm,  $t = 100$   $\mu\text{m}$ , and  $E = 4$  GPa; (b)  $L_0 = 23.5$  cm,  $t = 120$   $\mu\text{m}$ , and  $E = 5$  GPa. Colored circles in (a) and (b) correspond to pictures in Figs. 3(a) and 3(b), respectively.

(a free segment being limited by contacts at both ends) and three contacts. Later, more motifs are formed when the longest line contact buckles, such that, after  $n$  buckling events, the sheet exhibits  $n$  motifs, made of  $2n$  free segments and  $2n + 1$  contacts. The pattern of line contacts and free segments is roughly periodic with more or less identical line contacts, free segments, and motifs, due to metastability and friction forces [40]. At each buckling event, when  $n$  changes to  $n + 1$  motifs, the tangential force  $T$  suddenly drops to a smaller value exhibiting a snap-through instability. In between buckling events,  $T$  increases continuously while increasing the compression distance  $\Delta$  (Fig. 2).

Instead of an ever-repeating sequence, as usually observed [19–31], these buckling events stop, when the sheet shows a strong symmetry breaking. We observe that, after  $n_{\text{max}}$  buckling events, the free segment located closest to the compressed end deforms strongly and nonlinearly, by taking an S shape (purple curves, Fig. 3) that leads finally to the Yin-Yang pattern (orange curves, Fig. 3). Meanwhile, the tangential force  $T$  changes its behavior—after reaching a maximum  $T_{\text{max}}$  at  $\Delta_{\text{max}}$ ,  $T$  continuously decreases to a small value (purple data

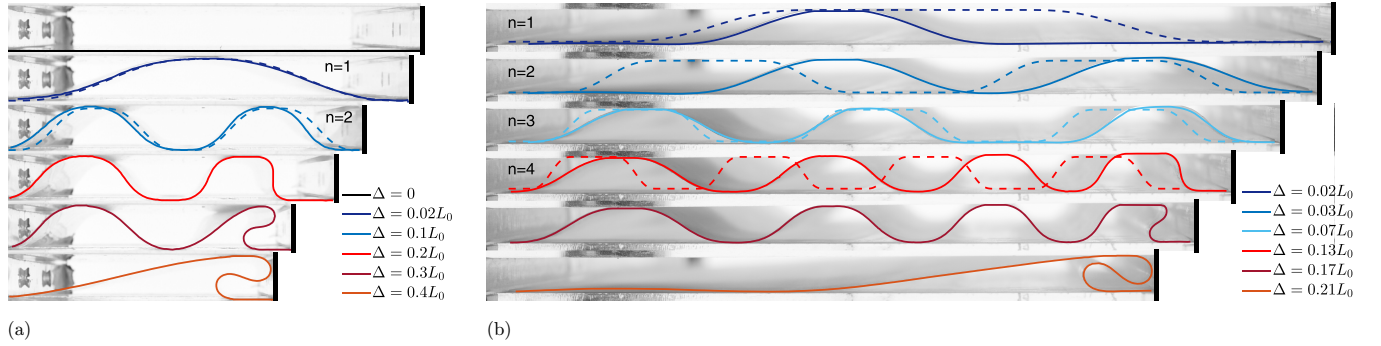


FIG. 3. Pictures of a sheet profile at different compression distances  $\Delta$  for the two configurations in Fig. 2. Between 1 and  $n_{\max}$  motifs are observed, before the spiraling of the sheet (the Yin-Yang pattern) which is the final pattern observed in the experiments.  $n_{\max} = 2$  in (a) and 4 in (b). The continuous and dashed lines are the experimental and theoretical predictions using the linearized Elastica (2), respectively.

points, Fig. 2). The final step is a last drop of  $T$ , corresponding to a last snap-through instability, which occurs when the S shape spirals instantaneously, making all the other previous motifs disappear, and thus leaves the Yin-Yang pattern as the ultimate state (orange data points, Fig. 2). See the Supplemental Material for a video showing both the sheet profile and the tangential force during the compression [41].

#### IV. THEORETICAL ANALYSIS

We now wish to describe the sheet's profile and the evolution of the force during its compression. We can parametrize the sheet by the local slope  $\theta(s)$  of the center line of a cross section normal to the  $z$  direction at each curvilinear position  $s \in [0, L_0]$ . See Fig. 4(a) for a scheme indicating the notations used for the calculations. This rod is modeled by the Euler Elastica equation, which can be written for each free segment as

$$BW\ddot{\theta}(s) = -T \sin \theta(s) + N \cos \theta(s), \quad (1)$$

where  $T$  and  $N$  are the tangential and normal forces exerted on the rod along the  $x$  and  $y$  axes, respectively. Considering  $\theta(s) \ll 1$ , Eq. (1) can be linearized, leading to

$$BWy''''(x) = -Ty''(x). \quad (2)$$

The assumptions underlying Eq. (2) are satisfied for moderate compression distances ( $\Delta \ll L_0$ ), but unjustified for large values of  $\Delta$ , where any local slope  $\theta$  reaches, and even exceeds,  $\pi/2$ . Note that describing the sheet using  $y(x)$  in Eq. (2) cannot parametrize the S shape or the Yin-Yang pattern where the local slope  $\theta$  is not small and hence  $y(x)$  is no longer a function.

Additionally, the length conservation for  $n$  identical free segments can be expressed as

$$\Delta \simeq n \int_0^H y^2(x) dx, \quad (3)$$

where  $H = (L - \Sigma \ell)/2n$  is the projected length per free segment, with  $\Sigma \ell$  being the total length of the line contacts [Fig. 4(a)].

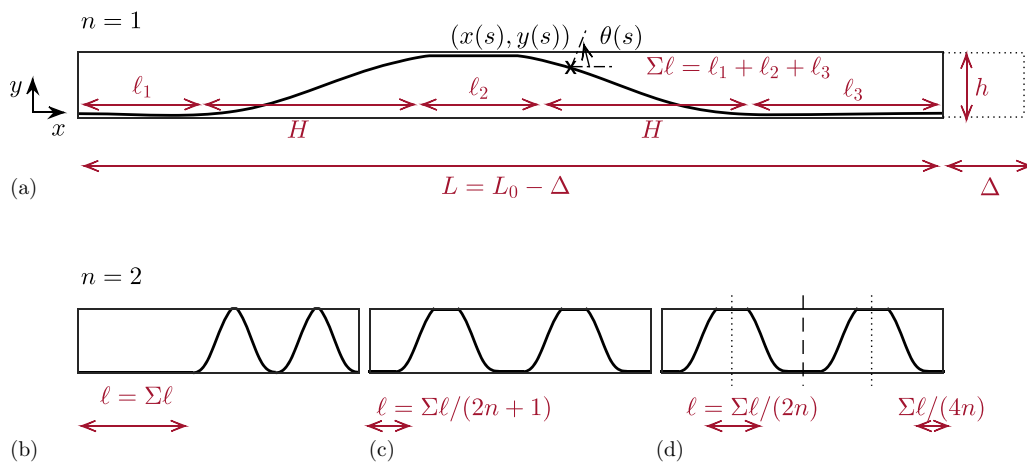


FIG. 4. (a) Notations: the sheet is parametrized by the local slope  $\theta(s)$  of the center line of a cross section normal to the  $z$  direction at each curvilinear position  $s \in [0, L_0]$ , of Cartesian coordinates  $[x(s), y(s)]$ .  $L_0$  is the total length of the sheet,  $\Delta$  is the compression distance,  $L = L_0 - \Delta$  is the horizontal distance, along the  $x$  axis, between the two opposite ends of the sheet, and  $h$  is the vertical gap.  $H$  is the projected length per free segment, while  $\Sigma \ell$  is the total length of the line contacts. (b)–(d) Three different spatial patterns of line contacts: (b) a single line contact; (c)  $2n + 1$  line contacts of equal length; (d) a perfectly periodic and symmetric pattern, the axes of which are represented by the dashed and dotted lines, respectively.  $\ell$  is the length of the longest line contact.

Solving the differential Eq. (2) with its boundary conditions and imposing the length conservation (3) allows one to obtain analytically the profile  $y(x)$  and the force-compression relation  $T(\Delta)$ . Note that this analysis changes slightly for different situations: no contact, point contacts, or line contacts.

When there is no contact, the tangential force  $T$  is proportional to the buckling force threshold  $T_{L_0}$ , times  $(2\pi)^2$  for clamped boundary conditions, just like in free buckling [39], namely

$$T_{L_0} = \frac{BW}{L_0^2}. \quad (4)$$

When the sheet is in contact with the walls ( $n = 1$ ), the transition between point and line contacts occurs when  $TL_0^2 \simeq (4\pi)^2 BW$  (assuming contacts of identical lengths), so that, already when  $\Delta$  and  $T$  are moderate, the point contacts become line contacts. It turns out that point contacts do not appear anymore when  $n \geq 2$ : all the contacts are immediately lines after each buckling event [25]. Since line contacts occur much more often, we will focus on this configuration in the following.

Assuming  $n$  identical motifs [40], the shape of a free segment is given by

$$y(x) = h[2\pi x/H - \sin(2\pi x/H)]/2\pi, \quad (5)$$

with  $TH^2 = (2\pi)^2 BW$  and

$$T(\Delta) \simeq \frac{BW}{h^2} \left( \frac{4\pi\Delta}{3hn} \right)^2. \quad (6)$$

Note that the projected length of a single free segment,  $H$ , changes during the process. It decreases from  $L_0/2n$ , by  $\Delta/2n$ , due to compression, and by  $\Sigma \ell/2n$ , due to the elongation of line contacts.

The mode transition occurs when the line contact of maximal length  $\ell$  buckles, when  $T\ell^2 = (2\pi)^2 BW$  [39]. Therefore, different spatial patterns of line contacts may lead to different thresholds of mode transitions, even for the same total length  $\Sigma \ell$  (Fig. 4). Hence the mode transition thresholds  $n(\Delta)$  cannot be uniquely predicted nor experimentally reproduced, because they are sensitive to the precise sequence of the buckling events. However, these thresholds are bounded by

$$n + 2n^2 \leq \frac{\Delta}{L_0} \frac{2}{3} \left( \frac{h}{L_0} \right)^{-2} \leq n + 4n^2. \quad (7)$$

The lower boundary corresponds to the case of a single line contact ( $\ell = \Sigma \ell$ ), as shown in Fig. 4(b), while the upper boundary corresponds to  $(2n + 1)$  contacts of identical lengths [ $\ell = \Sigma \ell/(2n + 1)$ ], as shown in Fig. 4(c). An intermediate case is possible when each sequence of two line contacts separated by a free segment is duplicated  $2n$  times, corresponding to a perfectly symmetric pattern ( $\ell = \Sigma \ell/2n$ ), as shown in Fig. 4(d), for which

$$\frac{\Delta}{L_0} = 6n^2 \left( \frac{h}{L_0} \right)^2. \quad (8)$$

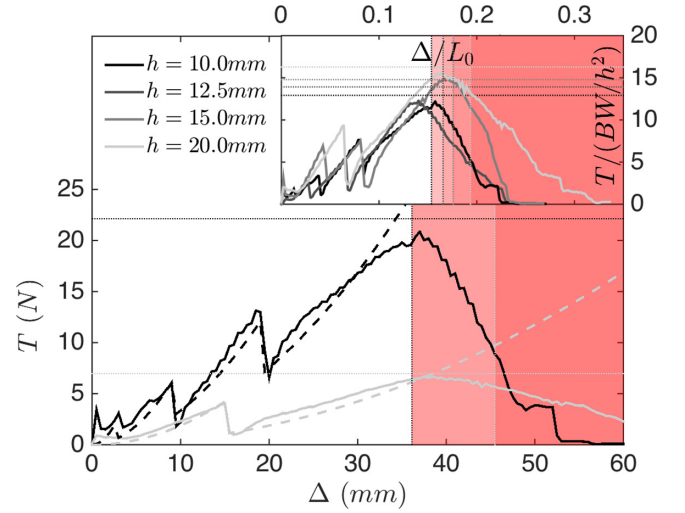


FIG. 5. Tangential force  $T$  as a function of the compression distance  $\Delta$  for a given elastic sheet ( $W = 20$  cm,  $L_0 = 23.5$  cm,  $t = 120$   $\mu\text{m}$ , and  $E = 5$  GPa) at different values of the gap  $h$  in the main panel, while dimensionless data  $T/(BW/h^2)(\Delta/L_0)$  are plotted in the inset. The dashed curves are predictions from Eqs. (6) and (7), while dotted lines are predictions of  $\Delta_{\text{max}}$  and  $T_{\text{max}}$  from Eqs. (13) and (14).

Thus, in the perfect symmetric and periodic case, one gets from Eq. (8)

$$n = \left\lfloor \sqrt{\frac{\Delta L_0}{6h^2}} \right\rfloor, \quad (9)$$

where  $\lfloor \cdot \rfloor$  is the floor function.

## V. SPIRALING TRANSITION

Concerning the morphology, the agreement of the linear approximation [Eqs. (5) and (9)] with experiments is quite good, as shown for two configurations in Fig. 3 for moderate values of  $\Delta$ , especially when the motifs are fairly regular [Fig. 3(a)].

Concerning the force, the analytical expression (6) for  $T(\Delta)$ , with the number of motifs  $n$  that lies within the bounds given by Eq. (7), quantitatively describes the experiments, as can be seen in Fig. 5 for a given elastic sheet and different values of the gap  $h$ . Obviously, Eq. (6) does not capture the experimental measurement of  $T(\Delta)$  for  $\Delta \geq \Delta_{\text{max}}$ , where the sheet profiles are not properly captured by the linearized theory.

Combining Eqs. (6) and (9) highlights the characteristic force scale

$$T_h = \frac{BW}{h^2} \quad (10)$$

that becomes relevant in bilaterally constrained systems, and which replaces  $T_{L_0}$  that is pertinent for free buckling. Indeed, the inset of Fig. 5 shows that rescaling  $T$  by  $T_h$  and  $\Delta$  by  $L_0$  allows one to gather all curves.

Experimentally, the maximal number of motifs  $n_{\text{max}}$  before the appearance of the Yin-Yang pattern decreases with  $h$  and increases with  $L_0$  (Fig. 6). However,  $n_{\text{max}}$  is independent of all



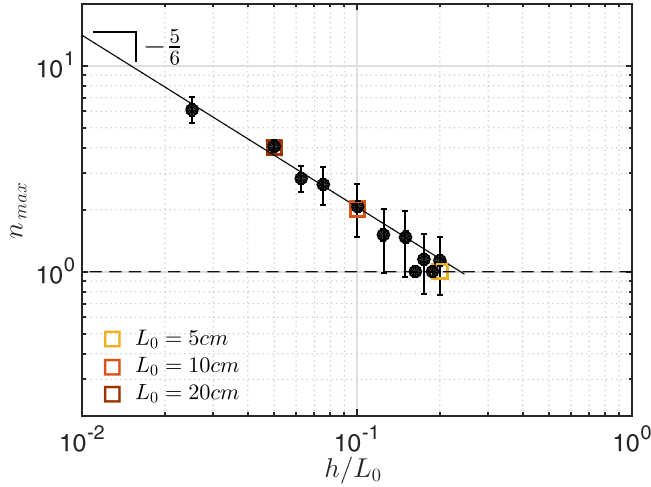


FIG. 6. Maximal number of motifs  $n_{\max}$  observed before the spiraling of the sheet as a function of  $h/L_0$  and power law of exponent  $-5/6$  [Eq. (12)]. The circles were averaged for different  $W$ ,  $t$ ,  $E$ , and  $B$  at a constant  $L_0 = 23.5$  cm, while the squares correspond to different  $L_0$  at a constant gap.

the other control parameters varied here ( $W$ ,  $t$ ,  $E$ ). In order to understand  $n_{\max}$ , we compare the bending energy, measured by  $BW \int_0^{L_0} \ddot{\theta}^2(s) ds/2$ , that we approximate by  $BW \ddot{\Theta}^2 S/2$ , denoted by  $E_n$  for the configuration composed of  $n$  motifs, with the typical curvature  $\ddot{\Theta} \approx n^2 h/L_0^2$  along a length  $S \approx L_0$ , and denoted by  $E_{\text{Yin-Yang}}$  for a single Yin-Yang pattern, with the typical curvature  $\ddot{\Theta} \approx L_0/nh^2$  along a length  $S \approx h$ . Figure 7 presents the typical curvature  $\ddot{\Theta}$  and the support length  $S$  for two configurations and in Ref. [42] we provide some further details. One finds

$$\frac{E_{\text{Yin-Yang}}}{E_n} \propto \frac{1}{n^6} \left( \frac{L_0}{h} \right)^5. \quad (11)$$

We expect a transition between the two patterns (for  $n = n_{\max}$ ) when the energy  $E_{\text{Yin-Yang}}$  falls below  $E_n$ , leading to the scaling law

$$n_{\max} \propto \left( \frac{h}{L_0} \right)^{-5/6}, \quad (12)$$

which is valid for small  $h/L_0$  and  $n_{\max} = 1$  for large  $h/L_0$ . This prediction is consistent with our experimental measure-

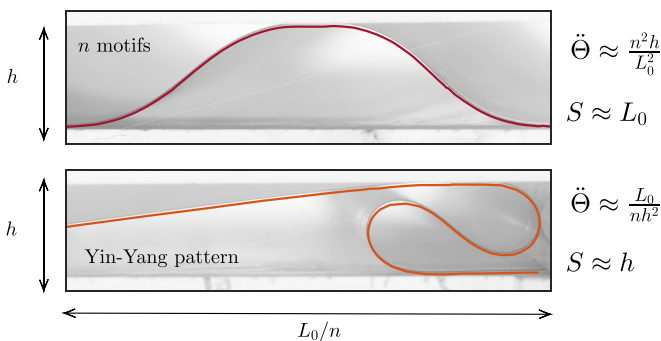


FIG. 7. Typical curvature  $\ddot{\Theta}$  and support length  $S$  for the two configurations:  $n$  motifs vs Yin-Yang pattern.

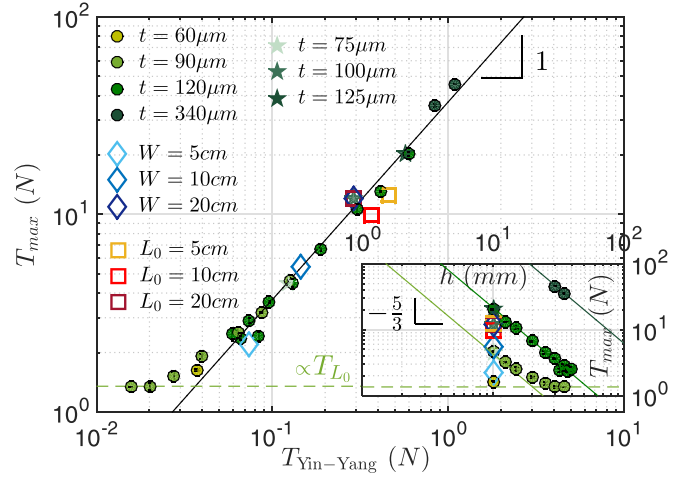


FIG. 8. Experimental measurements of the maximal compressive tangential force  $T_{\max}$  (for different values of  $t$ ,  $W$ ,  $L_0$ , and  $h$  indicated in legends) as a function of the prediction  $T_{\text{Yin-Yang}}$  [Eq. (14)], while the raw data  $T_{\max}(h)$  are plotted in the inset.

ments, as shown in Fig. 6, with a prefactor 0.3. We observe that  $n_{\max}$  reaches 1 for  $h/L_0 \geq 0.2$ , with this value appearing to be the characteristic aspect ratio between small and large  $h/L_0$ .

Being interested in the compression distance  $\Delta_{\max}$  at which  $n_{\max}$  is reached, we obtain from Eqs. (8) and (12) the scaling law

$$\frac{\Delta_{\max}}{L_0} \propto \left( \frac{h}{L_0} \right)^{1/3}, \quad (13)$$

valid for small  $h/L_0$ .

Based on these results [Eqs. (6), (12), and (13)], we obtain for the maximal force  $T_{\max}$ , which appears before the Yin-Yang transition,  $T_{\max} \propto T_{\text{Yin-Yang}}$  for small  $h/L_0$ , where

$$T_{\text{Yin-Yang}} = \frac{BW}{L_0^{1/3} h^{5/3}} \quad (14)$$

is the characteristic force scale of the Yin-Yang pattern. However,  $T_{\max} \propto T_{L_0}$  for large values of  $h/L_0$ . This scaling law is compared, in the main panel of Fig. 8, with our experimental measurements, corresponding to different values of  $t$ ,  $W$ ,  $L_0$ , and  $h$ : the agreement is excellent, with a multiplicative constant 37, while raw data sets  $T_{\max}(h)$  are shown in the inset. Note the saturation of  $T_{\max}$  at large values of  $h/L_0$ .

As a summary, Fig. 9 shows the phase diagram of a confined elastic sheet, as a function of the lateral constraint  $h/L_0$  and the compression constraint  $\Delta/L_0$ . The states with  $n = 1, 2, 3, 4$  motifs and the S-shape/Yin-Yang states are plotted as triangles and circles, respectively. Several realizations with the same control parameters are presented in order to show the multistability of this system and the experimental reproducibility. Among the properties of the elastic sheet, only its length  $L_0$  influences its state, through  $h/L_0$  and  $\Delta/L_0$ . Thus this single phase diagram should describe any confined compressed elastic sheet. The dashed lines are predictions [Eq. (8)] based on the linearized Euler Elastica, assuming perfectly periodic motifs, surrounded by shaded areas that represent uncertainty regions [Eq. (7)], which originate from the

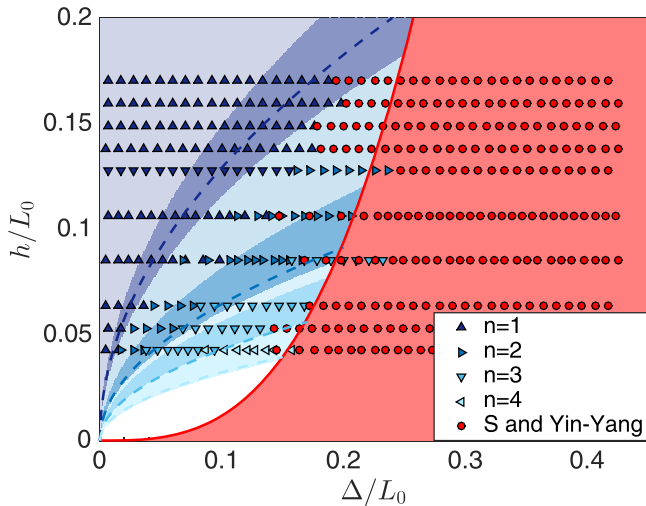


FIG. 9. Phase diagram that summarizes the possible configurations of the buckled elastic sheet (from 1 to 4 motifs and the S-shape/Yin-Yang state) in the plane of dimensionless bilateral constraints  $h/L_0$  and  $\Delta/L_0$ . The dashed and solid lines are predictions from Eq. (8) for several values of  $n$  (from 1 to 4) and Eq. (13), respectively. The shaded area around each dashed line represents an uncertainty region based on Eq. (7), which originates from the different possible patterns of line contacts.

different possible patterns of line contacts. The solid line represents the predicted threshold for the nonlinear deformation of the sheet [Eq. (13)], with the prefactor 0.44, determined from the previous experimental constants. All these mode transitions experimentally reported are well described by our predictions.

## VI. CONCLUSION

In this article, we studied the response of a thin sheet compressed from the side in a restricted volume. In particular, we provide a full phase diagram of the equilibrium state of a 1D line in a 2D container. We show that a pure elastic linear analysis provides a good qualitative and even quantitative description of the various mode transitions exhibited by the system. However, it fails to capture the transition to the

Yin-Yang regime. Instead, a global energy consideration allows one to determine this transition. We demonstrate the relevance of three force scales in bilaterally constrained buckling of an elastic sheet, namely  $T_{L_0}$  for free buckling,  $T_h$  for buckling in a confined box, and most interestingly  $T_{\text{Yin-Yang}}$  for the transition towards the single Yin-Yang pattern.

The phase diagram we report (Fig. 9) should apply to any 1D elastic sheet restricted to a 2D container, including the results reported in Roman *et al.* [19–21], where the container was compressed from above. The phenomenology of that system was apparently different, namely the modes were symmetric and most importantly the Yin-Yang regime was not observed. Our phase diagram can explain this difference. First, typical initial conditions and the compression protocol used in [19] avoid altogether the Yin-Yang regime. Second, the presence of friction here, even if reduced as much as possible, not accounted for in the model, tends to enhance the symmetry breaking between the buckled segments, when the sheet is compressed from the side.

It would be interesting to extend our analysis to a full nonlinear theory, particularly in order to describe the evolution at the Yin-Yang transition and to explore much larger compression lengths, inducing more contacts and self-contacts and leading to complex patterns. Another important challenge is to consider the role of friction [7,24,43–45]. In particular, friction can block the sheet in places where the normal force exceeds a certain threshold, thus creating a smaller subsystem that continues to be compressed while screening the compressive forces from the rest of the sheet. A solid description of this system may lead to a better understanding of systems that are composed of multiple layers [46–49] or when confinement is induced by liquid interfaces [50,51] or granular materials [52] and energy harvesting in bistable or multistable composites [29].

## ACKNOWLEDGMENTS

We thank the students C. Borilla, V. Buyle, S. Klintzing, A. Malod, A. Richard, F. Wu, and N. Zeroual, T. Bastien and L. Quartier for their technical help, and A. Abramian, F. Bertails-Descoubes, O. Devauchelle, E. Lajeunesse, and S. Neukirch for scientific discussions.

- [1] O. Pouliquen, M. Belzons, and M. Nicolas, Fluctuating particle motion during shear induced granular compaction, *Phys. Rev. Lett.* **91**, 014301 (2003).
- [2] D. Cantor, M. Cárdenas-Barrantes, I. Preechawuttipong, M. Renouf, and E. Azéma, Compaction model for highly deformable particle assemblies, *Phys. Rev. Lett.* **124**, 208003 (2020).
- [3] Y. Bhosale, N. Weiner, A. Butler, S. H. Kim, M. Gazzola, and H. King, Micromechanical origin of plasticity and hysteresis in nestlike packings, *Phys. Rev. Lett.* **128**, 198003 (2022).
- [4] L. Boué and E. Katzav, Folding of flexible rods confined in 2d space, *Europhys. Lett.* **80**, 54002 (2007).
- [5] J. Xiao and X. Chen, Buckling morphology of an elastic beam between two parallel lateral constraints: implication for a snake crawling between walls, *J. R. Soc. Interface* **10**, 20130399 (2013).
- [6] M. Bayraktar and J. Männer, Cardiac looping may be driven by compressive loads resulting from unequal growth of the heart and pericardial cavity. Observations on a physical simulation model, *Front. Physiol.* **5**, 112 (2014).
- [7] J. Miller, T. Su, J. Pabon, N. Wicks, K. Bertoldi, and P. M. Reis, Buckling of a thin elastic rod inside a horizontal cylindrical constraint, *Extrem. Mech. Lett.* **3**, 36 (2015).
- [8] J.-P. Liu, X.-Y. Zhong, Z.-B. Cheng, X.-Q. Feng, and G.-X. Ren, Buckling of a slender rod confined in a circular tube: theory, simulation, and experiment, *Int. J. Mech. Sci.* **140**, 288 (2018).

- [9] E. Katzav, M. Adda-Bedia, and A. Boudaoud, A statistical approach to close packing of elastic rods and to dna packaging in viral capsids, *Proc. Natl. Acad. Sci. USA* **103**, 18900 (2006).
- [10] D. Grossman, E. Katzav, and E. Sharon, Packing of stiff rods on ellipsoids: Geometry, *Phys. Rev. E* **103**, 013001 (2021).
- [11] H. Elettro, S. Neukirch, F. Vollrath, and A. Antkowiak, In-drop capillary spooling of spider capture thread inspires hybrid fibers with mixed solid-liquid mechanical properties, *Proc. Natl. Acad. Sci. USA* **113**, 6143 (2016).
- [12] S. Deboeuf, E. Katzav, A. Boudaoud, D. Bonn, and M. Adda-Bedia, Comparative study of crumpling and folding of thin sheets, *Phys. Rev. Lett.* **110**, 104301 (2013).
- [13] H. Kobayashi, B. Kresling, and J. F. Vincent, The geometry of unfolding tree leaves, *Proc. R. Soc. B* **265**, 147 (1998).
- [14] E. Couturier, S. C. Du Pont, and S. Douady, The filling law: a general framework for leaf folding and its consequences on leaf shape diversity, *J. Theor. Biol.* **289**, 47 (2011).
- [15] J. Hall, II. On the vertical position and convolutions of certain strata, and their relation with granite, *Trans. R. Soc. Edinb.* **7**, 79 (1815).
- [16] L. D. Landau, E. M. Lifshitz, A. M. Kosevich, and L. P. Pitaevskii, *Theory of Elasticity: Volume 7* (Elsevier, Amsterdam, 1986).
- [17] B. Audoly and Y. Pomeau, *Elasticity and Geometry. From Hair Curls to the Nonlinear Response of Shells* (Oxford University Press, Oxford, 2010).
- [18] O. M. O'Reilly, *Modeling Nonlinear Problems in the Mechanics of Strings and Rods* (Springer, Berlin, 2017).
- [19] B. Roman and A. Pocheau, Buckling cascade of thin plates: Forms, constraints and similarity, *Europhys. Lett.* **46**, 602 (1999).
- [20] B. Roman and A. Pocheau, Postbuckling of bilaterally constrained rectangular thin plates, *J. Mech. Phys. Solids* **50**, 2379 (2002).
- [21] A. Pocheau and B. Roman, Uniqueness of solutions for constrained elastica, *Physica D* **192**, 161 (2004).
- [22] H.-G. Paap and L. Kramer, Wavenumber restriction in systems with discontinuous nonlinearities and the buckling instability of plates, *J. Phys. France* **48**, 1471 (1987).
- [23] H. Iseki, R. Sowerby, N. Chandrasekaran, and P. Gatt, The elastic-plastic snapping-through of a curved metal strip compressed between two rigid plates: (The influence of the supported end condition on the snap-through), *JSME Int. J., Solid Mech., Strength Mater.* **32**, 101 (1989).
- [24] X. Chateau and Q. S. Nguyen, Buckling of elastic structures in unilateral contact with or without friction, *Eur. J. Mech. A Solids* **10**, 71 (1991).
- [25] H. Chai, The post-buckling response of a bi-laterally constrained column, *J. Mech. Phys. Solids* **46**, 1155 (1998).
- [26] P. Holmes, G. Domokos, J. Schmitt, and I. Szeberényi, Constrained Euler buckling: An interplay of computation and analysis, *Comput. Meth. Appl. Mech. Eng.* **170**, 175 (1999).
- [27] W.-C. Ro, J.-S. Chen, and S.-Y. Hong, Vibration and stability of a constrained elastica with variable length, *Int. J. Solids Struct.* **47**, 2143 (2010).
- [28] W. Borchani, N. Lajnef, and R. Burgueño, Energy method solution for the postbuckling response of an axially loaded bilaterally constrained beam, *Mech. Res. Commun.* **70**, 114 (2015).
- [29] S. Liu and R. Burgueño, Controlled elastic postbuckling of bilaterally constrained non-prismatic columns: Application to enhanced quasi-static energy harvesters, *Smart Mater. Struct.* **25**, 125010 (2016).
- [30] P. Jiao, W. Borchani, and N. Lajnef, Large deformation solutions to post-buckled beams confined by movable and flexible constraints: A static and dynamic analysis, *Int. J. Solids Struct.* **128**, 85 (2017).
- [31] A. Liakou and E. Detournay, Constrained buckling of variable length elastica: Solution by geometrical segmentation, *Int. J. Non Linear Mech.* **99**, 204 (2018).
- [32] G. Domokos, W. Fraser, and I. Szeberényi, Symmetry-breaking bifurcations of the uplifted elastic strip, *Physica D* **185**, 67 (2003).
- [33] L. Boué, M. Adda-Bedia, A. Boudaoud, D. Cassani, Y. Couder, A. Eddi, and M. Trejo, Spiral patterns in the packing of flexible structures, *Phys. Rev. Lett.* **97**, 166104 (2006).
- [34] S. Deboeuf, M. Adda-Bedia, and A. Boudaoud, Energy distributions and effective temperatures in the packing of elastic sheets, *Europhys. Lett.* **85**, 24002 (2009).
- [35] H. Diamant and T. A. Witten, Compression induced folding of a sheet: An integrable system, *Phys. Rev. Lett.* **107**, 164302 (2011).
- [36] J.-S. Chen and Y.-C. Lin, Vibration and stability of a long heavy elastica on rigid foundation, *Int. J. Non Linear Mech.* **50**, 11 (2013).
- [37] V. Démary, B. Davidovitch, and C. D. Santangelo, Mechanics of large folds in thin interfacial films, *Phys. Rev. E* **90**, 042401 (2014).
- [38] X. Cheng, S. Xu, T. Jin, Z. Shen, and Y. Zhang, Bifurcation and mode transition of buckled ribbons under oblique compressions, *Mech. Res. Commun.* **131**, 104145 (2023).
- [39] L. Euler, *Methodus Inveniendi Lineas Curvas Maximi Minimive Proprietate Gaudentes Sive Solutio Problematis Isoperimetrici Latissimo Sensu Accepti (Zürich, 1744)* (Springer Science & Business Media, New York, 1952), Vol. 1.
- [40] Note that the free segments are expected to be identical in absence of friction forces.
- [41] See Supplemental Material at <http://link.aps.org/supplemental/10.1103/PhysRevResearch.6.013100> for a video showing both the sheet profile and the tangential force during the compression.
- [42] Note that whereas we approximate the  $n$ th motif by a function  $y(x)$  and  $\theta = d^2\theta(s)/ds^2 \simeq d^2y(x)/dx^2 \approx Y/X^2$ , we approximate the Yin-Yang pattern by a function  $x(y)$  and  $\dot{\theta} \simeq d^2x(y)/dy^2 \approx X/Y^2$ , with  $X \approx L_0/n$  and  $Y \approx h$ .
- [43] R. Vetter, F. K. Wittel, and H. J. Herrmann, Morphogenesis of filaments growing in flexible confinements, *Nat. Commun.* **5**, 4437 (2014).
- [44] V. Romero, M. Ly, A. H. Rasheed, R. Charrondière, A. Lazarus, S. Neukirch, and F. Bertails-Descoubes, Physical validation of simulators in computer graphics: A new framework dedicated to slender elastic structures and frictional contact, *ACM Trans. Graph.* **40**, 1 (2021).
- [45] S. Alben, Packing of elastic rings with friction, *Proc. R. Soc. A* **478**, 20210742 (2022).
- [46] G. W. Hunt, Reflections and symmetries in space and time, *IMA J. Appl. Math.* **76**, 2 (2011).
- [47] H. O. Badr, X. Zhao, S. Koumlis, G. J. Tucker, L. Lamberson, and M. W. Barsoum, Confined buckling in thin



- sheets and its correlation to riplocations: A deformation mechanism in layered solids, *Phys. Rev. Mater.* **5**, 093603 (2021).
- [48] H. Chai and D. Moshkovitz, On the post-buckling behavior of laterally constrained multilayers, *Int. J. Solids Struct.* **257**, 111827 (2022).
- [49] A. Guerra, A. C. Slim, D. P. Holmes, and O. Kodio, Self-ordering of buckling, bending, and bumping beams, *Phys. Rev. Lett.* **130**, 148201 (2023).
- [50] E. Jambon-Puillet, D. Vella, and S. Protière, The compression of a heavy floating elastic film, *Soft Matter* **12**, 9289 (2016).
- [51] P. Grandgeorge, N. Krins, A. Hourlier-Fargette, C. Laberty-Robert, S. Neukirch, and A. Antkowiak, Capillarity-induced folds fuel extreme shape changes in thin wicked membranes, *Science* **360**, 296 (2018).
- [52] D. J. Schunter, Jr., M. Brandenbourger, S. Perriseau, and D. P. Holmes, Elastogranular mechanics: Buckling, jamming, and structure formation, *Phys. Rev. Lett.* **120**, 078002 (2018).