



HAL
open science

Non-uniform sampling & denoising applied to nuclear magnetic resonance

Guillaume Laurent, Christian Bonhomme

► **To cite this version:**

Guillaume Laurent, Christian Bonhomme. Non-uniform sampling & denoising applied to nuclear magnetic resonance. Spring School on Sparse Representations and Compressed Sensing, Apr 2016, Ilmenau, Germany. hal-01516795

HAL Id: hal-01516795

<https://hal.sorbonne-universite.fr/hal-01516795>

Submitted on 2 May 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution - NonCommercial - ShareAlike 4.0 International License



Non-Uniform Sampling & Denoising applied to Nuclear Magnetic Resonance



G. LAURENT, C. BONHOMME



Laboratoire de Chimie de la Matière Condensée de Paris



Context

Nuclear Magnetic Resonance




Physico-chemical spectroscopic analysis



Precise but poor sensitivity
100 mg of sample needed
Broad noisy peaks for distributed environments

Increasing sensitivity



Sensitivity gain = time gain or sample size gain

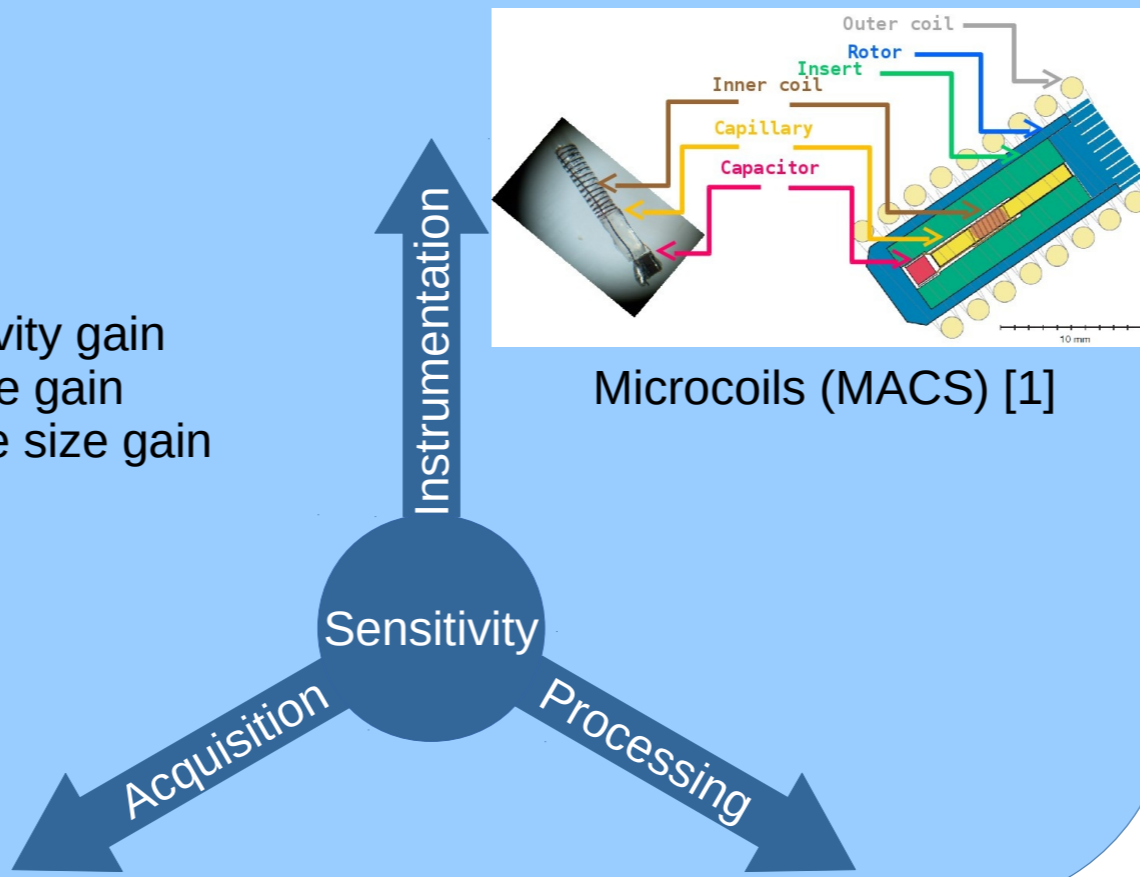


References

- [1] D. Sakellariou, G. L. Goff, and J.-F. Jacquinot, 'High-resolution, high-sensitivity NMR of nanolitre anisotropic samples by coil spinning', *Nature*, vol. 447, no. 7145, pp. 694–697, Jul. 2007.
- [2] M. Mobli and J. C. Hoch, 'Nonuniform sampling and non-Fourier signal processing methods in multidimensional NMR', *Prog. Nucl. Mag. Res. Sp.*, vol. 83, pp. 21–41, Nov. 2014.
- [3] J. A. Cadzow, 'Signal enhancement—a composite property mapping algorithm', *IEEE T. Acoust. Speech*, vol. 36, no. 1, pp. 49–62, Jan. 1988.
- [4] P. P. Man, C. Bonhomme, and F. Babonneau, 'Denoising NMR time-domain signal by singular-value decomposition accelerated by graphics processing units', *Solid State Nucl. Mag.*, vol. 61–62, pp. 28–34, Jul. 2014.


Non-Uniform Sampling (NUS)

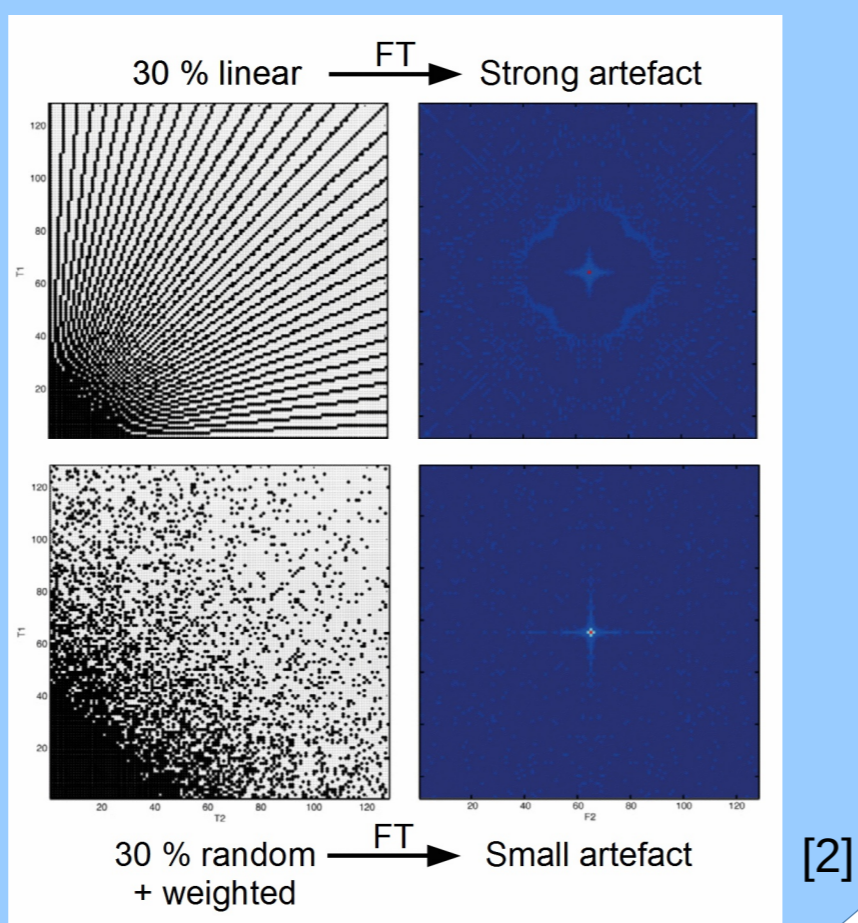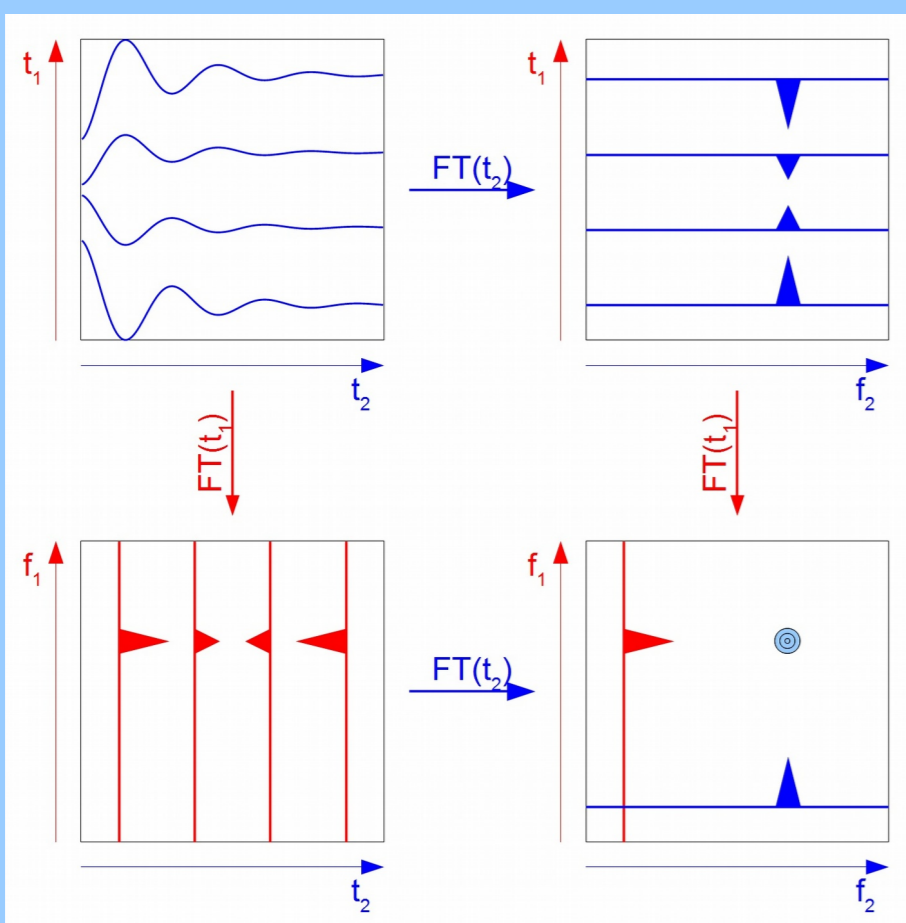



Tools

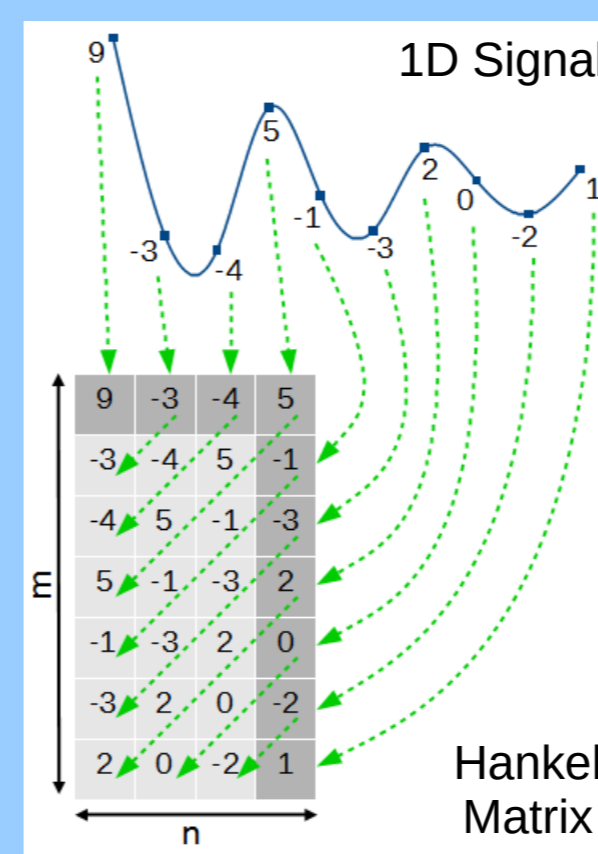

Spectra denoising

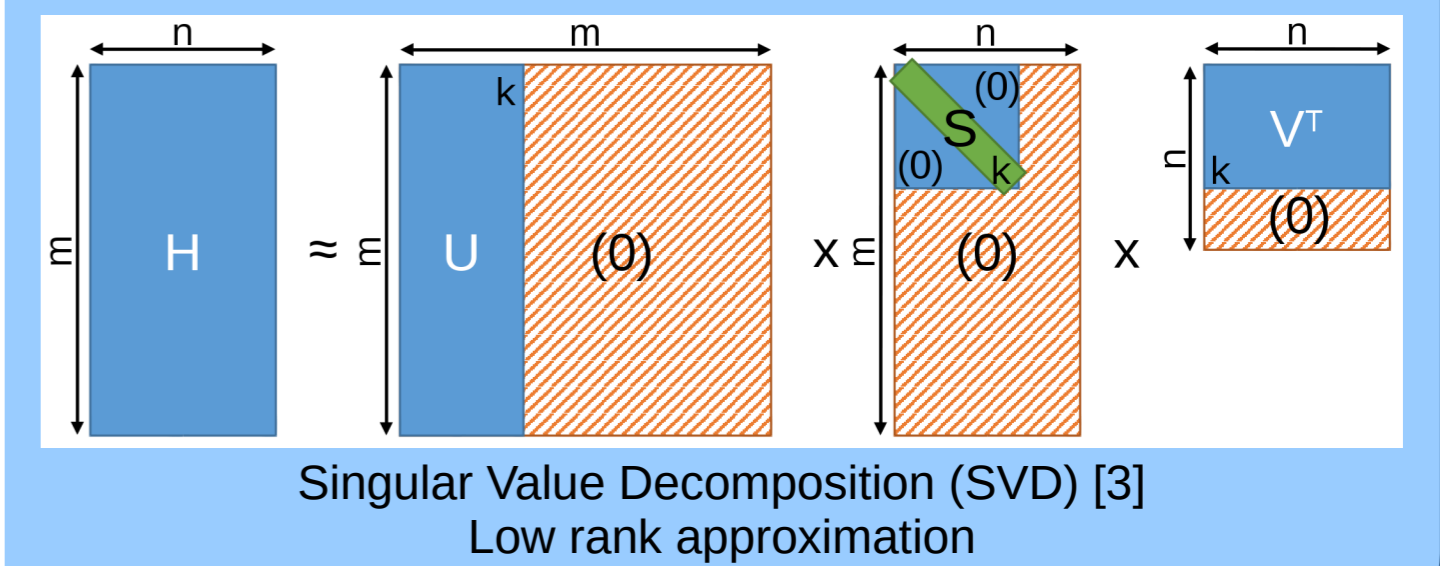

Results

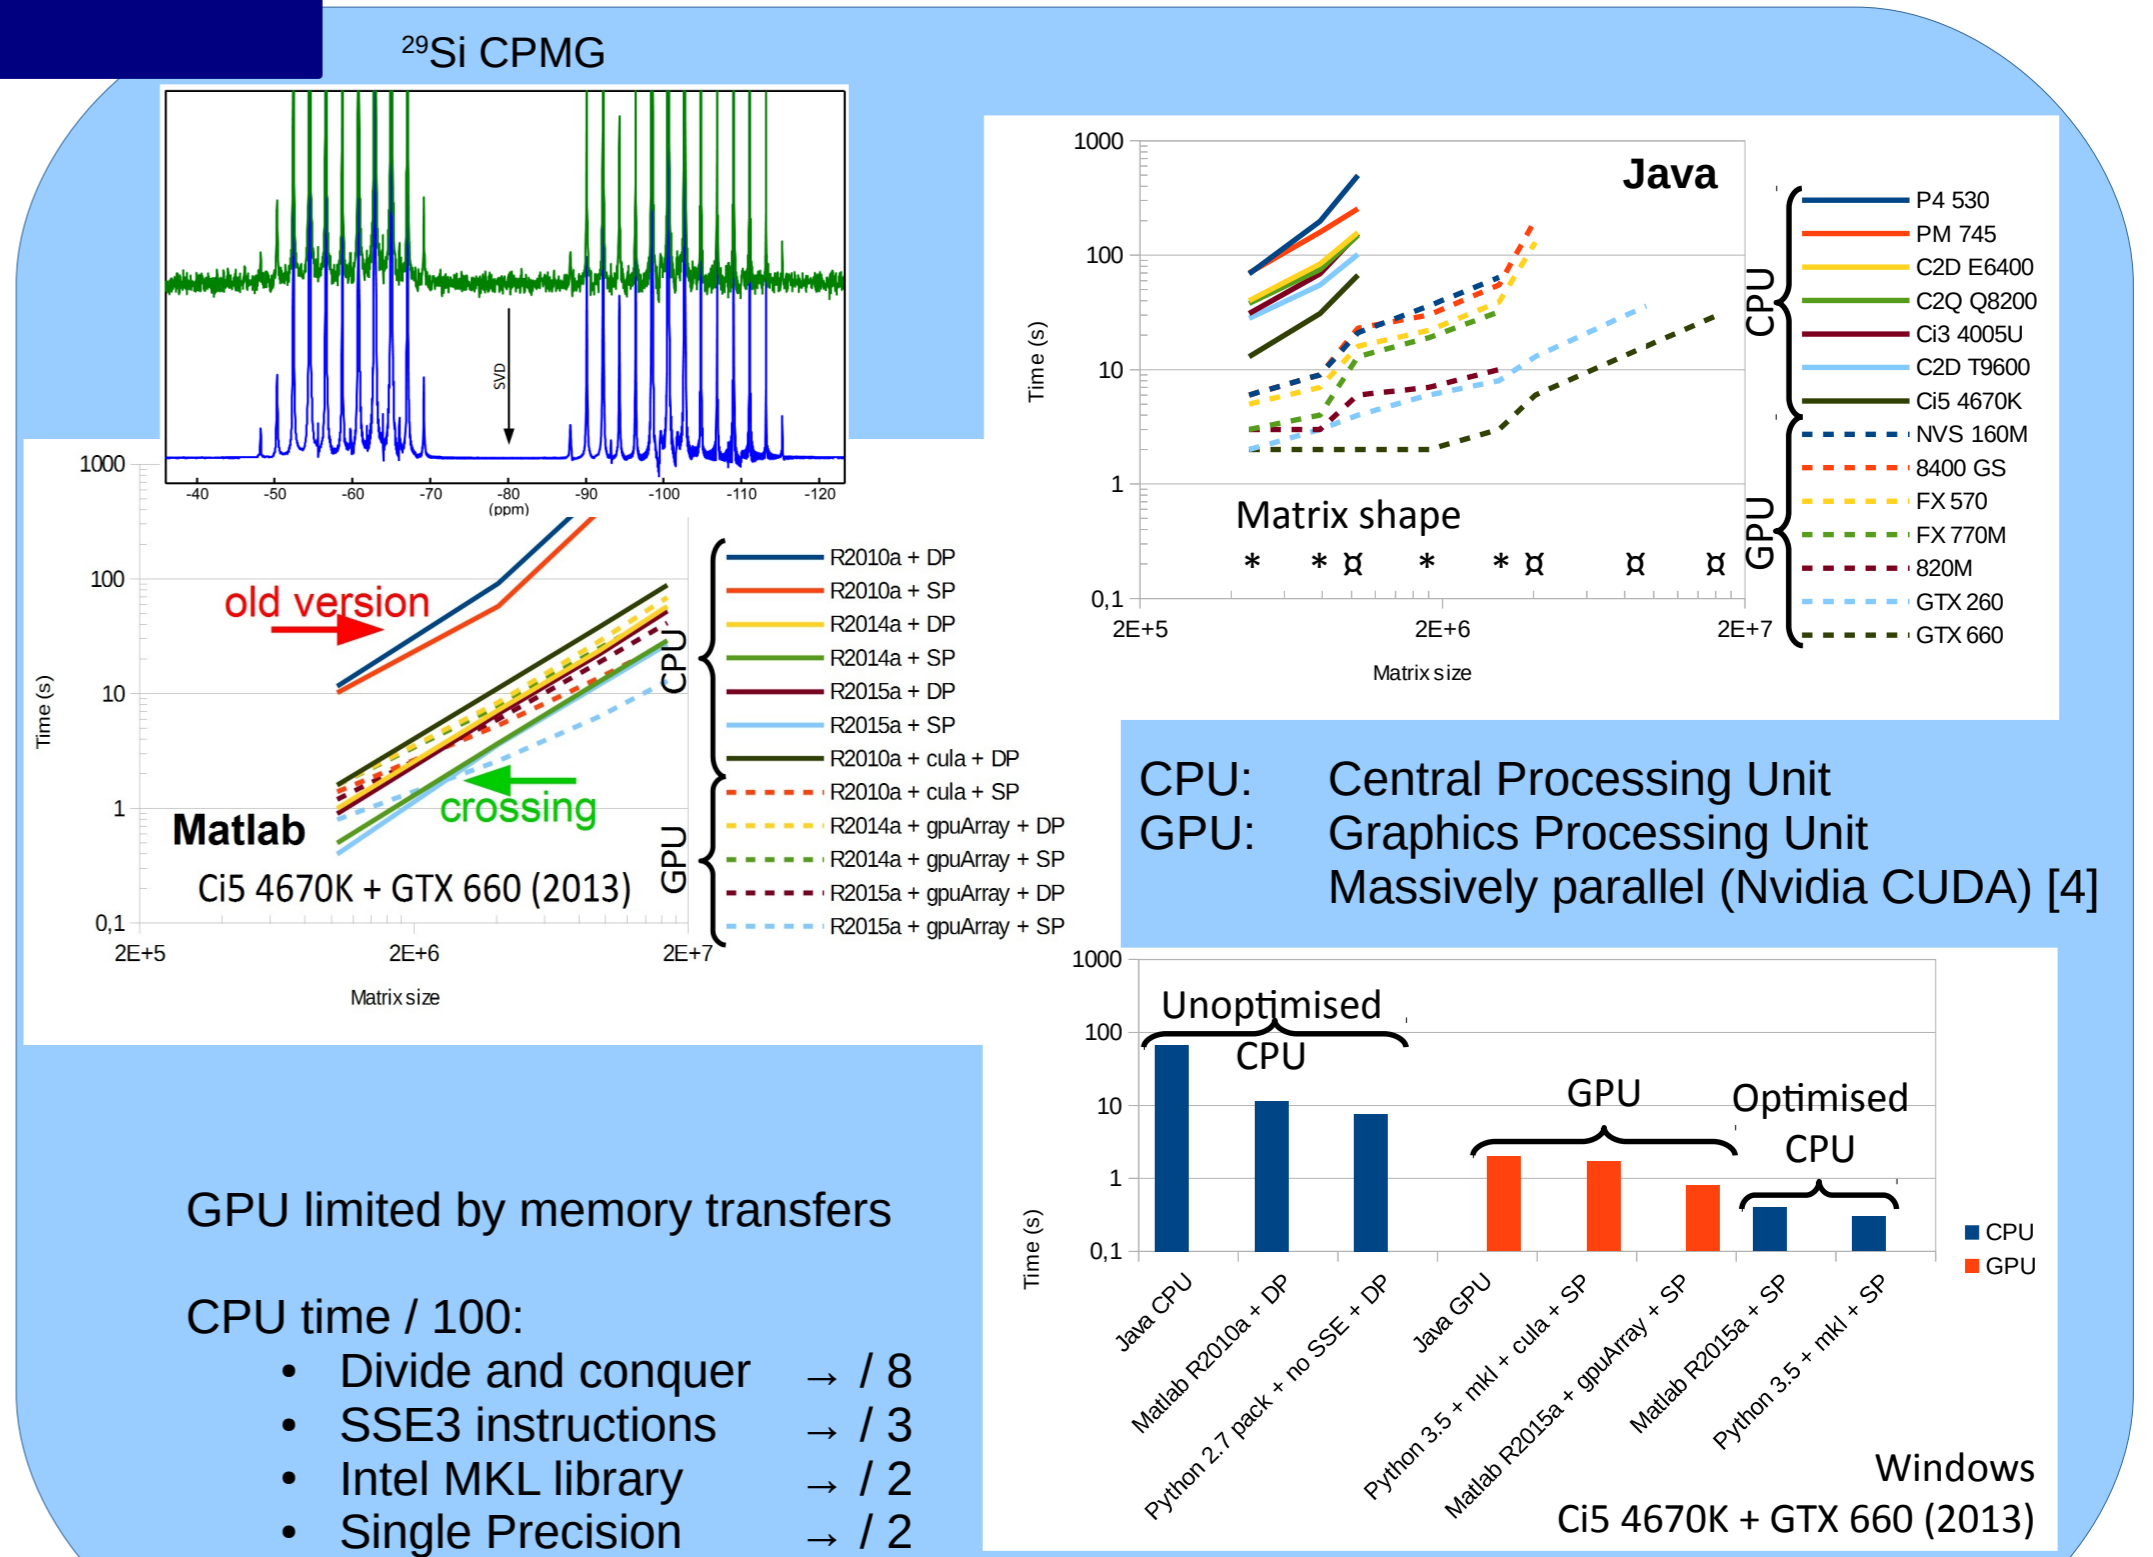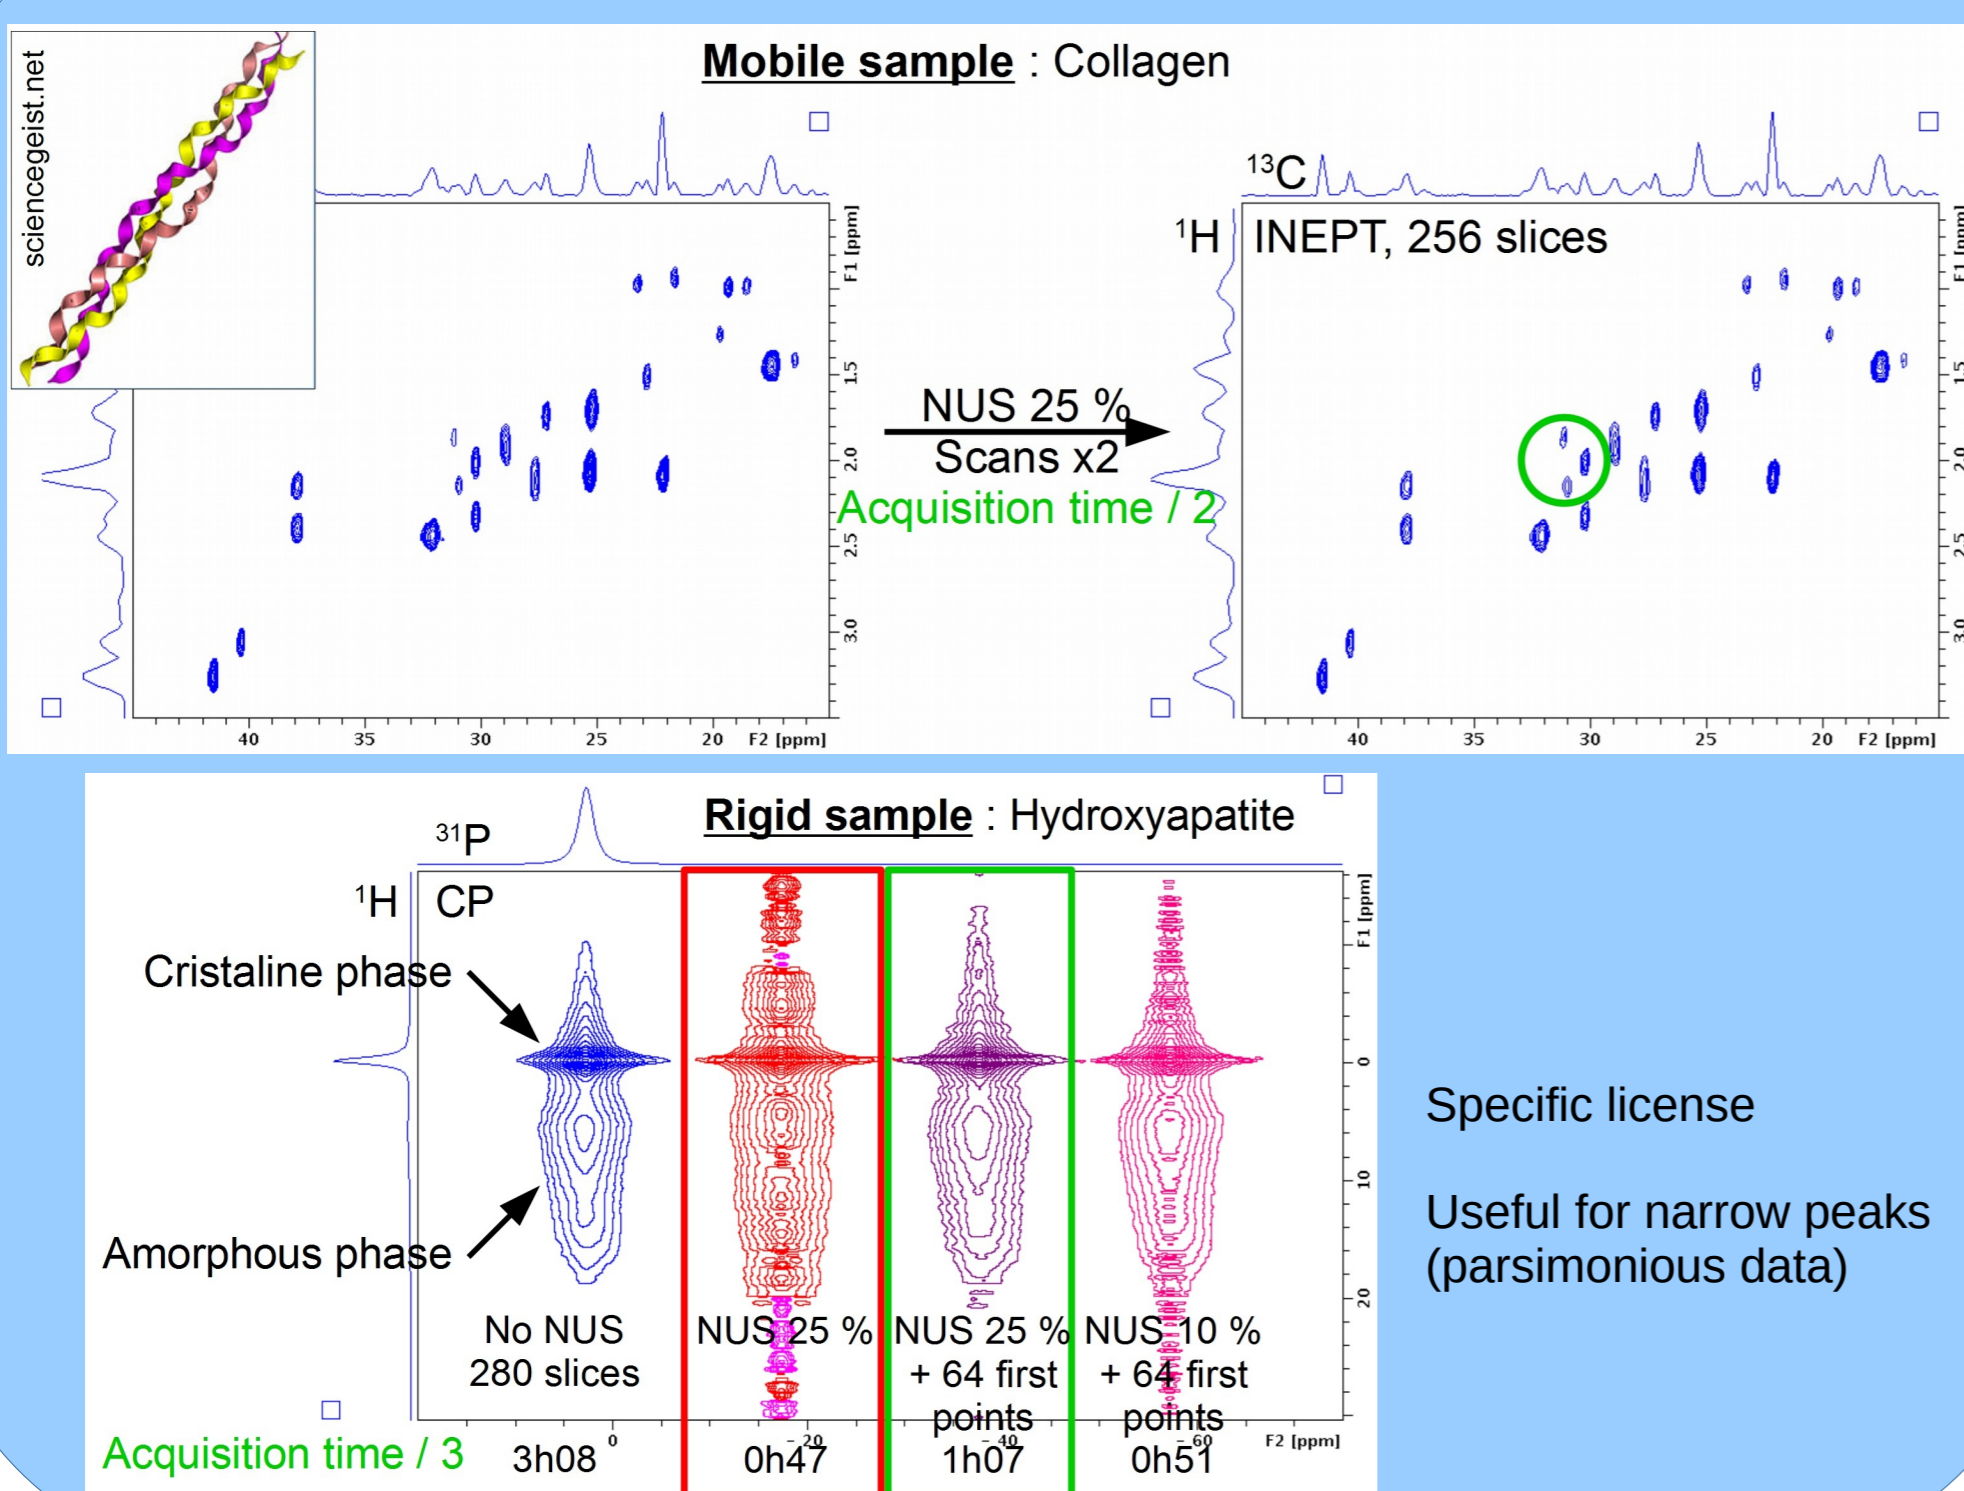

Highlights

- NUS and SVD are useful to increase sensitivity
- Efficient algorithms are critical
- Graphic card is a low cost option (Nvidia GTX 750 = 120 €)

Future work

- Automatic SVD thresholding
- Sparse matrix SVD
- Combining NUS and SVD

Acknowledgements

- V. BARRET-VIVIN, F. PORTIER and M. ROBIN for samples
- P. P. MAN for Java application
- W. WOELFFEL for python application